

# Series HSCS Pumps

## Technical Brochure

B-516E



**Bell & Gossett**  
a xylem brand

# Table of Contents

Useful Pump Formulas .....	2
Pump Engineering Data .....	3
Construction Materials .....	4
Exploded View .....	6

## Useful Pump Formulas

Pressure (PSI)	=	$\frac{\text{Head (Feet)} \times \text{Specific Gravity}}{2.31}$
Head (Feet)	=	$\frac{\text{Pressure (PSI)} \times 2.31}{\text{Specific Gravity}}$
Vacuum (Inches of Mercury)	=	Dynamic Suction Lift (Feet) x .883 x Specific Gravity
Horsepower (Brake)	=	$\frac{\text{GPM} \times \text{Head (Feet)} \times \text{Specific Gravity}}{3960 \times \text{Pump Efficiency}}$
Horsepower (Water)	=	$\frac{\text{GPM} \times \text{Head (Feet)} \times \text{Specific Gravity}}{3960}$
Efficiency (Pump)	=	$\frac{\text{Horsepower (Water)}}{\text{Horsepower (Brake)}} \times 100 \text{ Per Cent}$
NPSH (Available)	=	Positive Factors – Negative Factors

## Affinity Laws: Effect of change of speed or impeller diameter on centrifugal pumps.

	GPM Capacity	Ft. Head	BHP
Impeller Diameter Change	$Q_2 = \frac{D_2}{D_1} Q_1$	$H_2 = \left(\frac{D_2}{D_1}\right)^2 H_1$	$P_2 = \left(\frac{D_2}{D_1}\right)^3 P_1$
Speed Change	$Q_2 = \frac{RPM_2}{RPM_1} Q_1$	$H_2 = \left(\frac{RPM_2}{RPM_1}\right)^2 H_1$	$P_2 = \left(\frac{RPM_2}{RPM_1}\right)^3 P_1$

Where Q = GPM, H = Head, P = BHP, D = Impeller Dia., RPM = Pump Speed

# Engineering Data

## Series HSCS Large Split Case Pumps

### SINGLE STAGE - DOUBLE SUCTION

Pump Size		④ 8x12x22M	④ 8x12x22L	10x14x20S	10x14x20L	12x16x23	14x16x17	14x18x23
All Dimensions in Inches (mm)								
① 125# FF Std ASA Flanges (Standard)	Max. Suction Pressure PSIG (bar)	75 (5)	75 (5)	75 (5)	75 (5)	75 (5)	75 (5)	75 (5)
	Max. Working Pressure PSIG (bar)	300 (21)	300 (21)	175 (12)	175 (12)	175 (12)	175 (12)	175 (12)
	Max. Hydrostatic Test Pressure PSIG (bar) ③	450 (31)	450 (31)	262 (18)	262 (18)	262 (18)	262 (18)	262 (18)
	Casing Material	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
② 250# FF ASA Flanges (Optional)	Max. Suction Pressure PSIG (bar)	200 (14)	200 (14)	200 (14)	200 (14)	200 (14)	200 (14)	200 (14)
	Max. Working Pressure PSIG (bar)	400 (27)	400 (27)	300 (21)	300 (21)	300 (21)	300 (21)	300 (21)
	Max. Hydrostatic Test Pressure PSIG (bar) ③	600 (41)	600 (41)	450 (31)	450 (31)	450 (31)	450 (31)	450 (31)
	Casing Material	Ductile Iron	Ductile Iron	Ductile Iron	Ductile Iron	Ductile Iron	Ductile Iron	Ductile Iron
	Casing Wall Thickness	.625 (16)	.625 (16)	.625 (16)	.625 (16)	.625 (16)	.625 (16)	.625 (16)

### STUFF BOX DATA

All Dimensions in Inches (mm)								
Bore	5.125 (130)	5.125 (130)	5.125 (130)	5.125 (130)	5.125 (130)	5.125 (130)	5.125 (130)	5.125 (130)
Depth	4.812 (122)	4.812 (122)	4.812 (122)	4.812 (122)	4.812 (122)	4.812 (122)	4.812 (122)	4.812 (122)
Seal Cage Width	.75 (19)	.75 (19)	.75 (19)	.75 (19)	.75 (19)	.75 (19)	.75 (19)	.75 (19)
Packing No. Rings/Size Sq. With Seal Cage	6/.625	6/.625	6/.625	6/.625	6/.625	6/.625	6/.625	6/.625
Shaft Sleeve O.D.	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	4.625 (117)
Mechanical Seal Size Type 8-1	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	4.625 (117)
⑤ { Mechanical Seal Size (Type 8B1)	{ Major Dia. Minor Dia.	4.125 (105)	4.125 (105)	4.125 (105)	4.125 (105)	4.125 (105)	4.125 (105)	4.75 (121)
		3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	3.875 (98)	4.50 (114)

### IMPELLER DESIGN DATA

All Dimensions in Inches (mm)							
No. of Vanes	5	6	6	5	6	6	6
Inlet Area (Sq. Inches)	68	80	112	128	150	171	212
Inlet Velocity per 100 GPM (Ft/Sec)	.47	.40	.29	.25	.21	.19	.15
Maximum Diameter	21.0 (533)	23.0 (584)	19.8 (503)	19.8 (503)	23.0 (584)	17.5 (445)	23.0 (584)
Minimum Diameter	12.0 (305)	12.0 (305)	9.4 (239)	14.0 (356)	13.0 (330)	11.0 (279)	14.0 (356)
Maximum Sphere	1.4 (36)	1.6 (41)	1.63 (41)	1.56 (40)	1.63 (42)	1.2 (30)	2.1 (53)
VR <sup>2</sup> for Maximum Diameter (Lbs-Ft <sup>2</sup> )	52	58.5	46.6	52.0	108.9	45.5	120.1
Wear Ring Clearance — Diam. BRZ Impellers	.016-.019	.016-.019	.016-.019	.016-.019	.016-.019	.016-.019	.016-.019
	(.40-.48)	(.40-.48)	(.40-.48)	(.40-.48)	(.40-.48)	(.40-.48)	(.40-.48)

### SHAFT AND BEARING DATA

All Dimensions in Inches (mm)								
At Coupling	3.125 (79)	3.125 (79)	3.125 (79)	3.125 (79)	3.125 (79)	3.125 (79)	3.125 (79)	3.125 (79)
Thru Impeller and Sleeves	3.311 (84)	3.311 (84)	3.311 (84)	3.311 (84)	3.311 (84)	3.311 (84)	3.311 (84)	4.061 (103)
Shaft Span (1050)	Bearing to Bearing Centerline		35.8 (909)	35.8 (909)	40.5 (1029)	40.5 (1029)	40.5 (1029)	41.375
Ball Bearings	Inboard	6316	6316	6316	6316	6316	6316	6316
	Outboard	21316	21316	21316	21316	21316	21316	21316
Frame Designation	F21-D4	F21-D4	F21-E4	F21-E4	F21-E4	F21-E4	F21-E4	F21-F4

① Flange dimensions are in accordance with ANSI A21.10, AWWA C110 and ANSI B16.1 Class 125.

② Flange dimensions in accordance with ANSI B16.1 Class 250 except flanges are flat faced, i.e. FF.


③ The hydrostatic test will be in accordance with the latest edition of the Hydraulic Institute Standards, test will be maintained for a minimum of 10 minutes.

④ 12x8x22M and 12x8x22L are standard with 125 PSI ASA FF suction and 250 PSI ASA FF discharge flanges.


⑤ Balanced mechanical seals have a major and a minor diameter as listed.

# Construction Materials

## Series HSCS Large Split Case Pumps

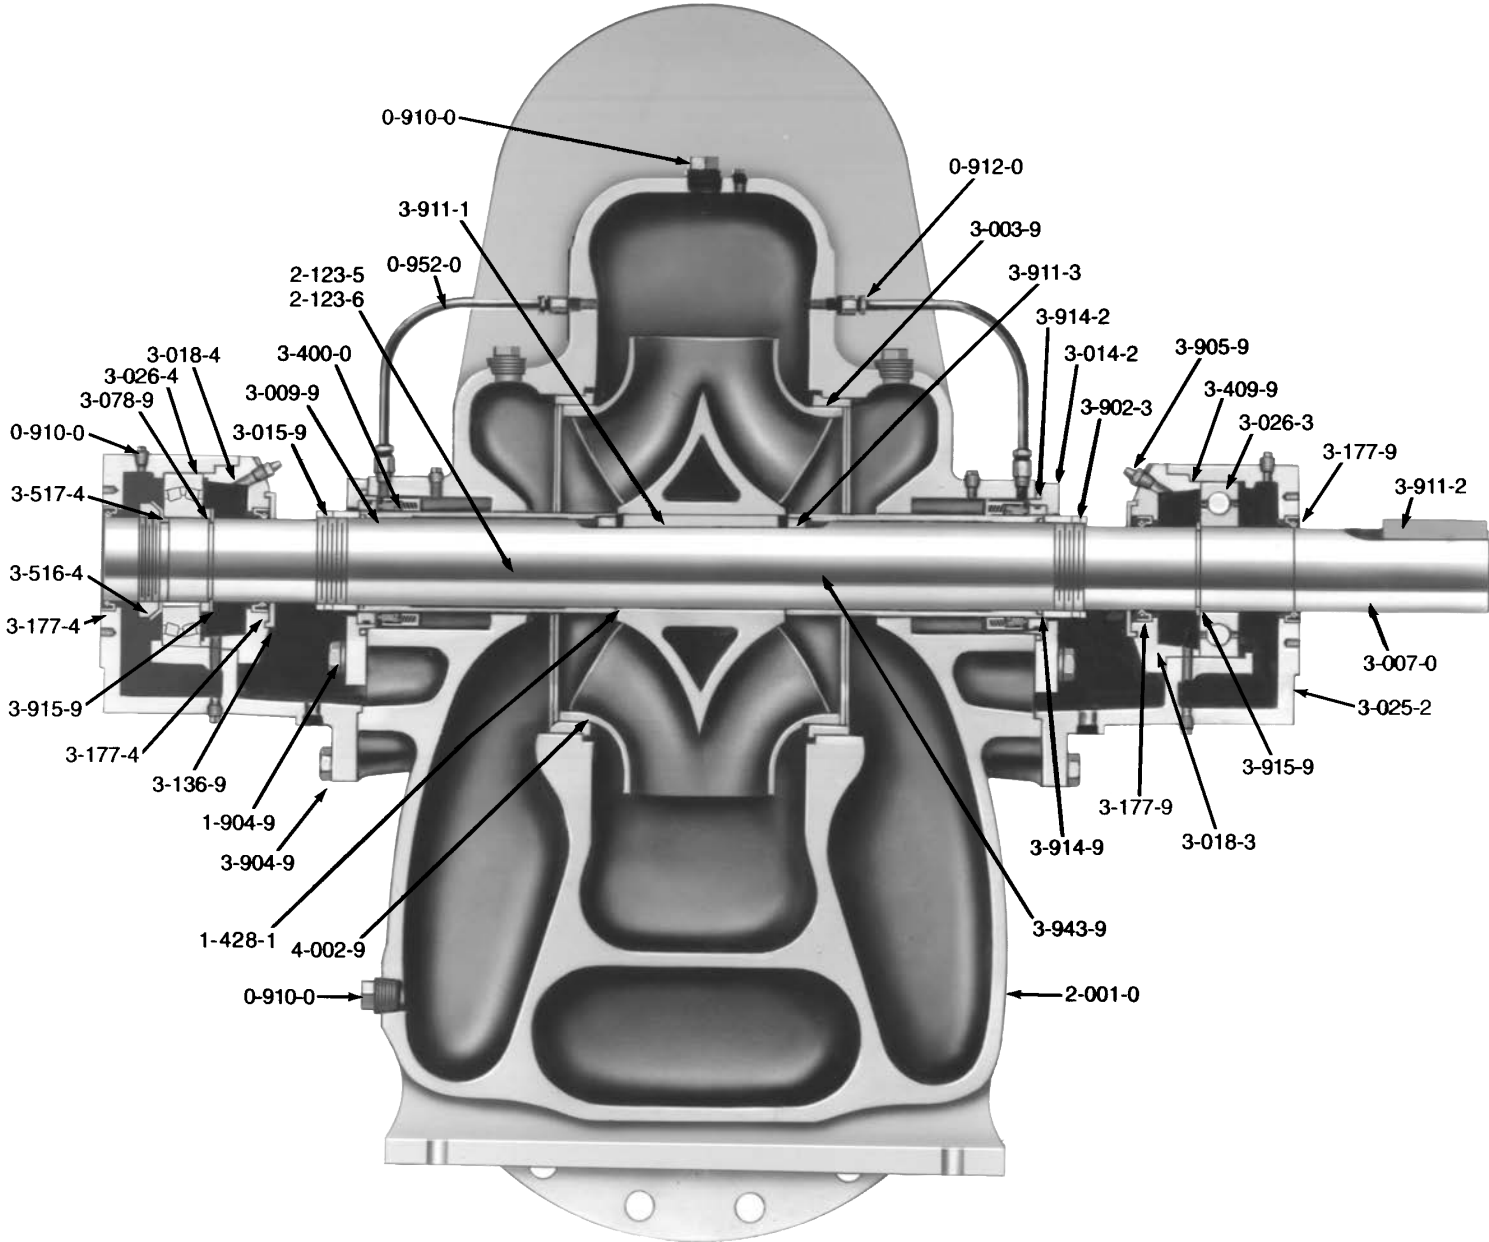

Impeller Wearing Rings

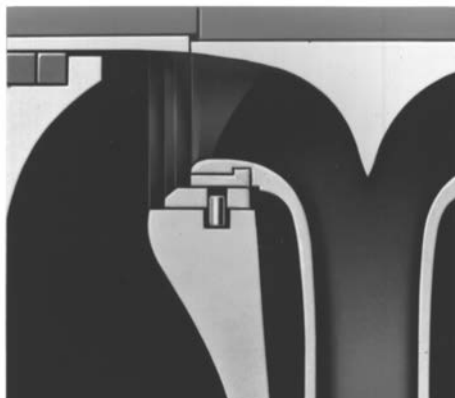

Impeller rings can be added - Optional Extra

# Construction Materials

## Series HSCS Large Split Case Pumps

### MECHANICAL SEALS MOUNTED ON SLEEVE

Catalog No.	Part Name	Standard Materials	Optional Materials
0-910-0	Pipe Plugs (Casing, Bearing Hsgs)	Steel	
0-912-0	Male Connectors	Brass	
0-952-0	Flush Line	Copper	
1-428-1	Gaskets (Sleeve)	Synthetic (Non-Asbestos)	
1-904-9	Bolts (Gland)	Stainless Steel (AISI 316)	
2-001-0	Casing	Cast Iron (ASTM A48 Class 35)	Ductile Iron (ASTM A536, Grade 65-45-12)
2-123-5	Casing Joint Gasket (Suction)	Paper (Vellumoid 505)	
2-123-6	Casing Joint Gasket (Discharge)	Paper (Vellumoid 505)	
2-904-1	Bolts (Casing)	Steel (Grade 8)	
3-400-0	Mechanical Seal (Type 8 or equal)	Viton / Carbon vs. Ceramic	
3-014-2	Glands (Mechanical Seal)	Cast Iron (ASTM A48 Class 25A)	
3-003-9	Casing Rings	Bronze (ASTM B584 Alloy 932)	
3-007-0	Shaft	Steel (SAE 1045) ①	316SS A276 UNS S31600 ②
3-009-9	Shaft Sleeves	Bronze (ASTM B584 Alloy 932)	
3-015-9	Shaft Sleeve Nuts	Bronze (ASTM B594 Alloy 932)	
3-018-3	Bearing Housing Cover (Inboard)	Cast Iron (ASTM A48 Class 30B)	
3-018-4	Bearing Housing Cover (Outboard)	Cast Iron (ASTM A48 Class 30B)	
3-025-2	Bearing Housings	Cast Iron (ASTM A48 Class 30B)	
3-026-3	Bearing (Inboard)	Steel	
3-026-4	Bearing (Outboard)	Steel	
3-078-9	Thrust Washer (Outboard)	Steel	
3-136-9	Deflectors	Rubber (Buna "N")	
3-177-4	Lip Seal (Outboard Bearing)	Rubber (Buna "N")	
3-177-9	Lip Seals (Bearing)	Rubber (Buna "N")	
3-409-9	Gaskets (Bearing Housing Covers)	Paper (Vellumoid 505)	
3-516-4	Locknut (Bearing)	Steel	
3-517-4	Lockwasher (Bearing)	Steel	
3-902-9	Set Screws	316 Stainless Steel	
3-904-9	Bolts (Bearing Covers)	Steel	
3-905-9	Grease Fittings	Steel	
3-911-1	Key (Impeller)	316 Stainless Steel	
3-911-2	Key (Coupling)	Steel	
3-911-3	Keys (Shaft Sleeves)	316 Stainless Steel	
3-914-2	O-Ring (Gland)	Rubber (Buna "N")	
3-914-9	O-Rings (Shaft Sleeves)	Rubber (Buna "N")	
3-915-9	Snap Rings	Steel	
3-943-9	Spirol Pins (Casing Rings)	302 Stainless Steel	
4-002-9	Impeller	Bronze (ASTM B594 Alloy 876)	

#### OPTIONAL COMPONENTS


4-004-9	Impeller Rings	Bronze (CDA 925)	
3-400-0	Balanced Mechanical Seal (Type 8B)	Viton / Carbon vs. Ceramic	

① Standard shaft material for size 14x10x20L is 4140.  
For speeds greater than 1200 RPM, the standard shaft material is 17-4 PH condition H1150 for sizes 16x12x23 and 16x14x17.

② Shaft material option is 17-4 PH condition H1150 for sizes 14x10x20L, 16x12x23 and 16x14x17.

# Exploded View

## Series HSCS Large Split Case Pumps

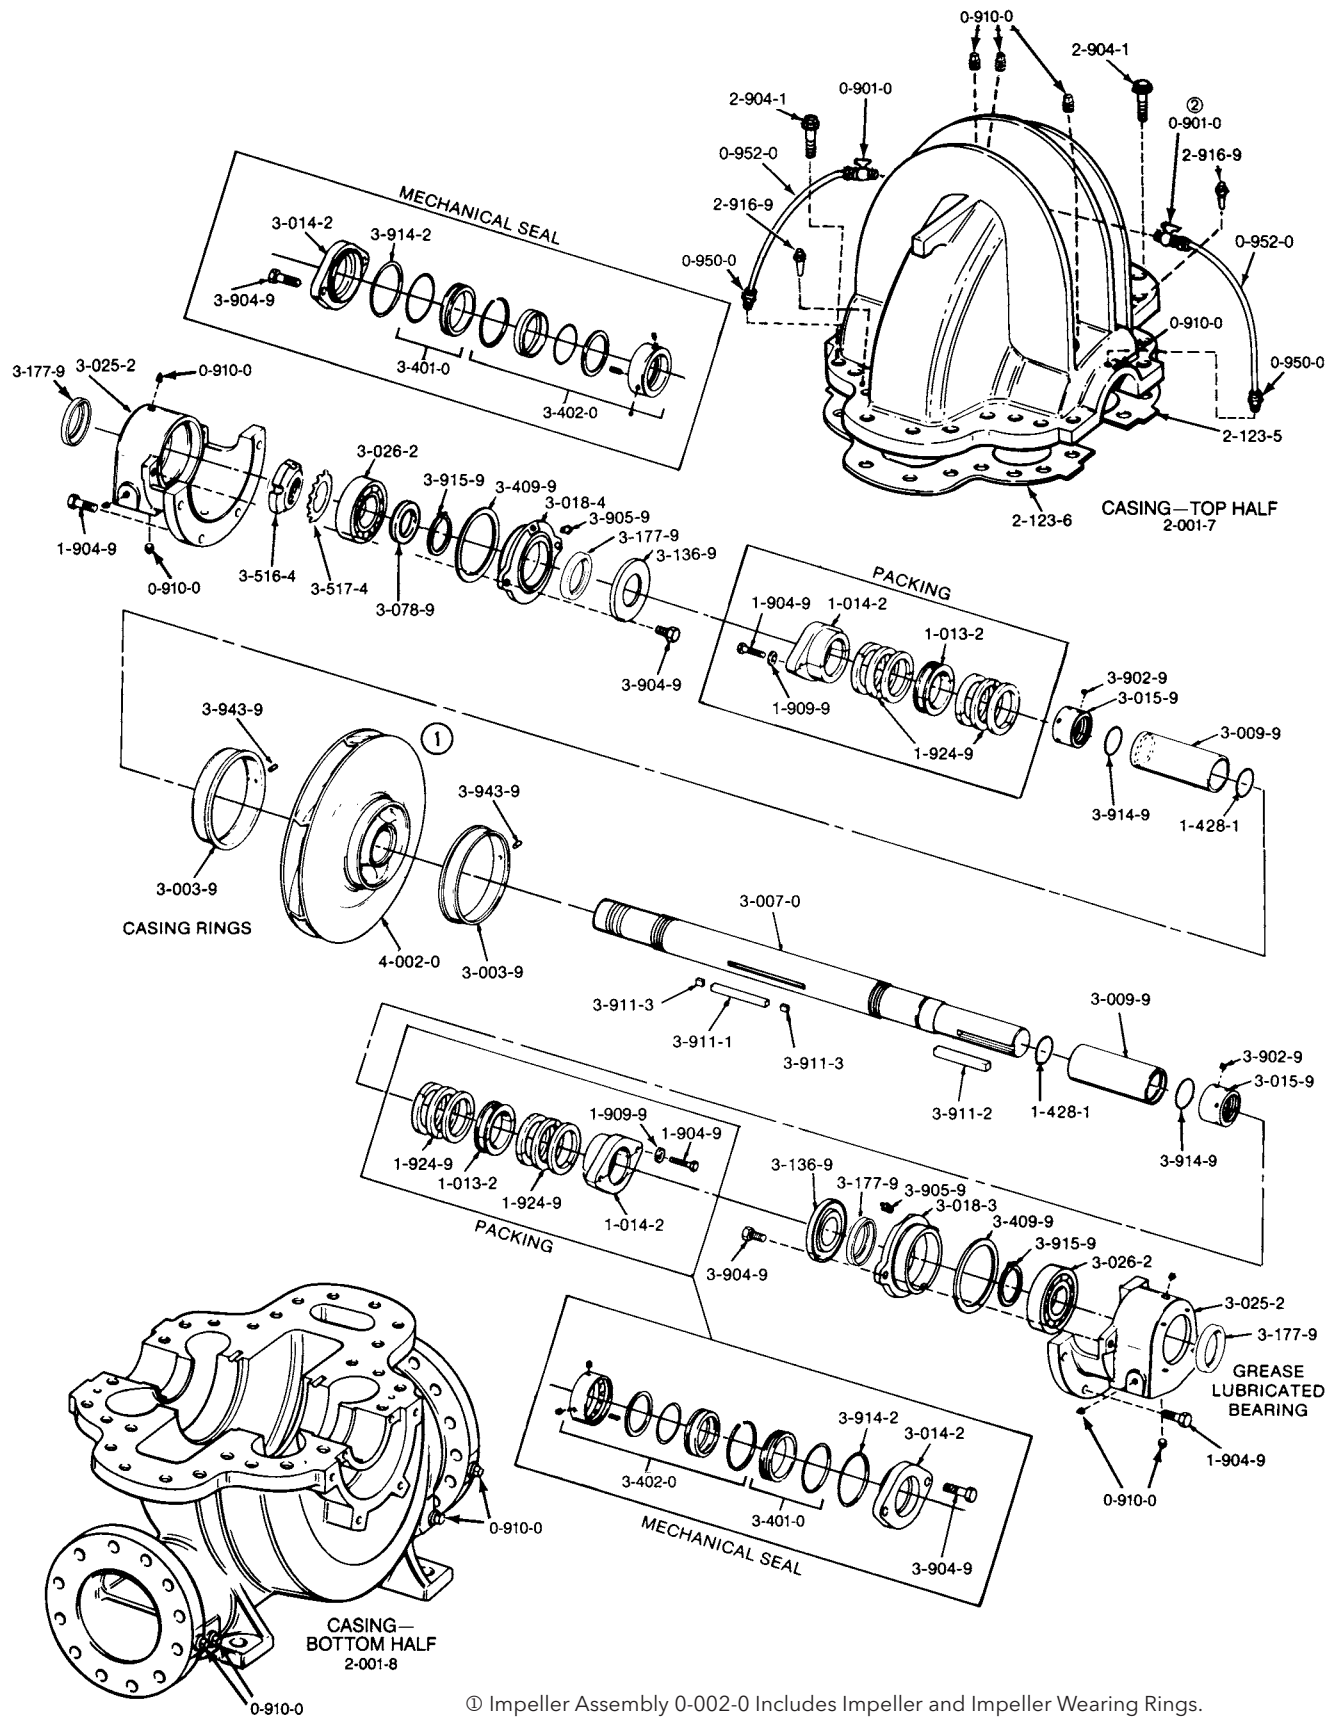

# The Little Red Schoolhouse® - Training the Industry



Bell & Gossett has long been known for its dedication to training. The "Little Red Schoolhouse®" has graduated over 60,000 students since it was founded in 1954.

Graduates from the "Little Red Schoolhouse" may be found throughout North America, Europe, Africa, Asia and Australia.

Seminars currently offered are:

- Modern Hydronic System Design - Basic\*
- Modern Hydronic System Design - Advanced\*
- Design & Application of Water Based HVAC Systems
- Large Chilled Water System Design\*
- Pump Service & Maintenance School
- Steam Systems Design & Applications
- Steam System Operation & Maintenance
- Plumbing Systems Design

For applications to attend these seminars, please contact a Bell & Gossett Representative in your area. They will have the schedule dates for all seminars and will make all the arrangements for you. As a service and a continuing educational source to the HVAC industry, these seminars are offered free of charge. IACET certified CEU credits are awarded for each seminar.

\* The USGBC has approved the technical and instructional quality of the Modern Hydronic Heating Systems - Basic Seminar (15 GBCI CE Hours) and the Large Chilled Water Design Seminar (11 GBCI CE Hours). These courses are approved for GBCI Continuing Education Hours towards LEED Credential Maintenance Programs.

# Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're 12,500 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

**For more information on how Xylem can help you, go to [www.xyleminc.com](http://www.xyleminc.com)**



Xylem Inc.  
8200 N. Austin Avenue  
Morton Grove, Illinois 60053  
Phone: (847) 966-3700  
Fax: (847) 965-8379  
[www.bellgossett.com](http://www.bellgossett.com)

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.  
© 2014 Xylem Inc. B-516E August 2014